


25mm THICK 10mm NOMINAL SIZE TYPE N ASPHALT
 35mm THICK 14mm NOMINAL SIZE TYPE N ASPHALT
 BITUMINOUS PRIME
 140mm THICK 20mm NOMINAL SIZE CLASS 2
 F.C.R. WET MIX

110mm THICK 20mm NOMINAL SIZE CLASS 3
 F.C.R.

310mm TOTAL

RESIDENTIAL MINOR LOCAL STREETS AND COURTS (ROAD RESERVE <16 m)

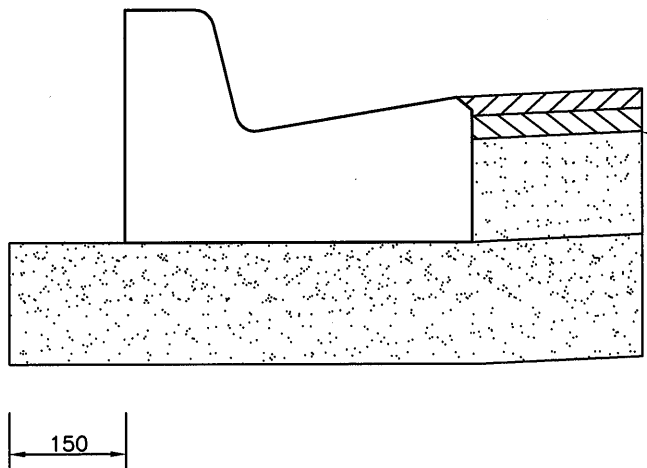

25mm THICK 10mm NOMINAL SIZE TYPE N ASPHALT
 35mm THICK 14mm NOMINAL SIZE TYPE N ASPHALT
 BITUMINOUS PRIME
 140mm THICK 20mm NOMINAL SIZE CLASS 2
 F.C.R. WET MIX(LAYED IN 2 LAYERS)

150mm THICK 20mm NOMINAL SIZE 3% CEMENT
 TREATED CLASS 3 F.C.R.

350mm TOTAL

RESIDENTIAL LOCAL COLLECTOR (18m ROAD RESERVE)

NOTES:

WHERE, INSITU SUBGRADE SOAKED CBR > 3%

1. SUITABLE COMPACTION PLANT SHALL BE EMPLOYED TO ACHIEVE AT LEAST 98% OF THE MAXIMUM MODIFIED DRY DENSITY, AS PER AUSTRALIAN STANDARD AS 1289.
2. SUBGRADE TO BE COMPACTED AND APPROVED PRIOR TO LAYING THE PAVEMENT.
3. FINAL ASPHALT LEVEL WEARING COURSE TO BE 5mm ABOVE LIP OF KERB



PAVEMENT MAKE UP
 RESIDENTIAL & INDUSTRIAL

DRAWN: M BASILE	CHECKED: S.Q	AMENDMENTS: SEPT 2014
SCALE: 1:10	DATE: SEPT 2014	BY: M BASILE

APPROVED

MANAGER
 ENGINEERING SERVICES

DRAWING No.

S115